


Series LWTH-LWD

LAMBDA 

An Invensys company

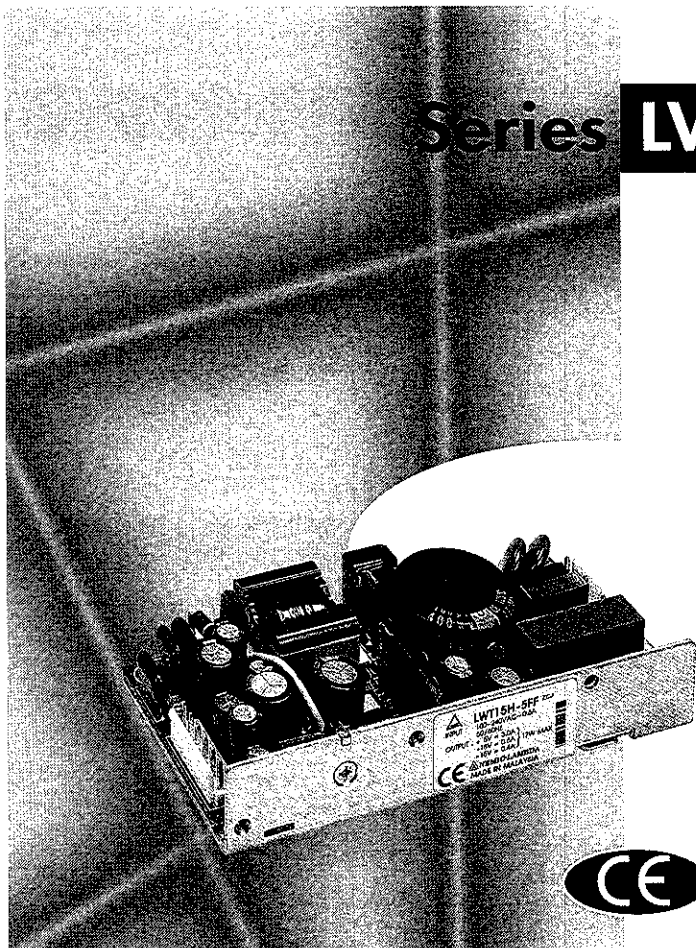

15-50

WATTS

POWER SUPPLY AC/DC

**DUAL OR
TRIPLE OUTPUT**

**Universal input
85 at 265VAC**

**Low profile :
26mm high**

Fully regulated outputs

**Conforms to EMI conducted
EN55022 curve B**

Guarantee 1 year

INPUT

Input voltage range	85-265VAC
Frequency	47-440Hz
Inrush current (at 200VAC)	28A on LWD 30, LWD 50, LWT 15H 32A on LWD 15, LWT 30H, LWT 50H
Input protection	fuse
Input voltage DC Input	110-330VDC

OUTPUT

Power (convection cooled)	15 to 50W
Adjustable output	+ 5% on output 1
Line regulation	1% on all models
Liner regulation	2% of 0 to 100% of charge
Hold up	20mS at full charge (at 100VAC)
Ripple and noise (value peak to peak) :	
on the 5V	100mV
on the 12V and the 15V	150mV
on the 24V	200mV
Coefficient temperature	0.02% / °C on output 1 0.04% / °C on outputs 2 and 3
Over current protection	current limit
Over voltage protection	135% output 1 only

GENERAL

Efficiency	63% on LWD 15 72% on other models
MTBF	Consult Technical Sales
Isolation voltage :	
Input-output	2kV RMS
Input-ground	2kV RMS
Isolation resistance	
Output-ground	> 100MΩ 500V

ENVIRONMENTAL

Operating temperature range (convection cooled)	0°C to + 60°C
Storage temperature	- 30°C to + 85°C
Relative humidity :	
operating	30% to 90% RH
storage	10% to 95 %

OUTLINE SPECIFICATIONS

ENVIRONMENTAL (continued)

Derating :
Convection/forced air + 10°C

Temp.	40°C	45°C	50°C	60°C
Model				
LWD	100%	100%	60%	40%
LWT 15H	100%	100%	80%	60%
LWT 30H	100%	100%	80%	60%
LWT 50H	100%	100%	80%	60%

Shock 20G

Vibration 2G

EMI LWT conforms to EN55022 curve B (conducted)

LWD conforms to EN55022 curve A (conducted)

TABLE OF MODELS

Model	Case	Power Watts	Current (min. load) Amp.	Output 1 Volts	Amp.	Output2 Volts	Amp.	Output 3 Volts	Amp.	Dimensions (L x W x H)
LWD 15 0512	15	15	0	5	1.5	12	0.6			110 x 60 x 26
LWD 30 0512	30	29	0	5	3.0	12	1.2			150 x 60 x 26
LWD 50 0512	50	49	1	5	5.0	12	2.0			160 x 97 x 26
LWD 15 0524	15	15	0	5	1.5	24	0.3			110 x 60 x 26
LWD 30 0524	30	29	0	5	3.0	24	0.6			150 x 60 x 26
LWD 50 0524	50	49	1	5	5.0	24	1.0			160 x 97 x 26
LWD 15 1212	15	14	0	12	0.6	12	0.6			110 x 60 x 26
LWD 30 1212	30	29	0	12	1.2	12	1.2			150 x 60 x 26
LWD 50 1212	50	48	0.4	12	2.0	12	2.0			160 x 97 x 26
LWD 15 1224	15	14	0	12	0.6	24	0.3			110 x 60 x 26
LWD 30 1224	30	29	0	12	1.2	24	0.6			150 x 60 x 26
LWD 50 1224	50	48	0.4	12	2.0	24	1.0			160 x 97 x 26
LWD 15 1515	15	15	0	15	0.5	15	0.5			110 x 60 x 26
LWD 30 1515	30	30	0	15	1.0	15	1.0			150 x 60 x 26
LWD 50 1515	50	48	0.3	15	1.6	15	1.6			160 x 97 x 26
LWT 15H 525	15H	17	0.5	5	3.0	+12	0.6	-5	0.4	128 x 60 x 26
LWT 30H 525	30H	30	0.7	5	5.0	+12	1.2	-5	0.6	160 x 70 x 26
LWT 50H 525	50H	50	1	5	8.0	+12	1.5	-5	1.0	160 x 97 x 26
LWT 15H 522	15H	17	0.5	5	3.0	+12	0.6	-12	0.4	128 x 60 x 26
LWT 30H 522	30H	30	0.7	5	5.0	+12	1.2	-12	0.6	160 x 70 x 26
LWT 50H 522	50H	50	1	5	8.0	+12	1.5	-12	1.0	160 x 97 x 26
LWT 15H 5FF	15H	17	0.5	5	3.0	+15	0.6	-15	0.4	128 x 60 x 26
LWT 30H 5FF	30H	30	0.7	5	5.0	+15	1.2	-15	0.6	160 x 70 x 26
LWT 50H 5FF	50H	50	1	5	8.0	+15	1.5	-15	1.0	160 x 97 x 26


CONNECTION

Input connector JST type VHR-5N
Output connector JST type VHR-5N (LWT 15H, LWD 15, 30)
JST type VHR-7N (LWT 30H, 50H, LWD 50)
Type of case open frame

Series LWD, Output connections :

LWD 15-30

LWD 50



Series LWTH-LWD

LAMBDA
An Invensys company

EDITION 2001

Technical drawing of a kitchen layout showing a side view and a top view.


Side View Dimensions:

- Overall width: 97 ± 1
- Overall height: 1175 ± 0.5
- Door height: 1105
- Door width: 9
- Drawer height: 60
- Drawer width: 1175 ± 0.5
- Bottom panel height: 26 ± 1
- Bottom panel width: 82 ± 0.5
- Bottom panel depth: 8
- Door handle: M3 2 Pos
- Drawer handle: M3 2 Pos


Top View Dimensions:

- Overall width: 91.5 ± 0.5
- Overall depth: 26
- Door handle: M3 2 Pos
- Drawer handle: M3 2 Pos

CASE 15H, 30H
Weights 0.22Kg, 0.3Kg

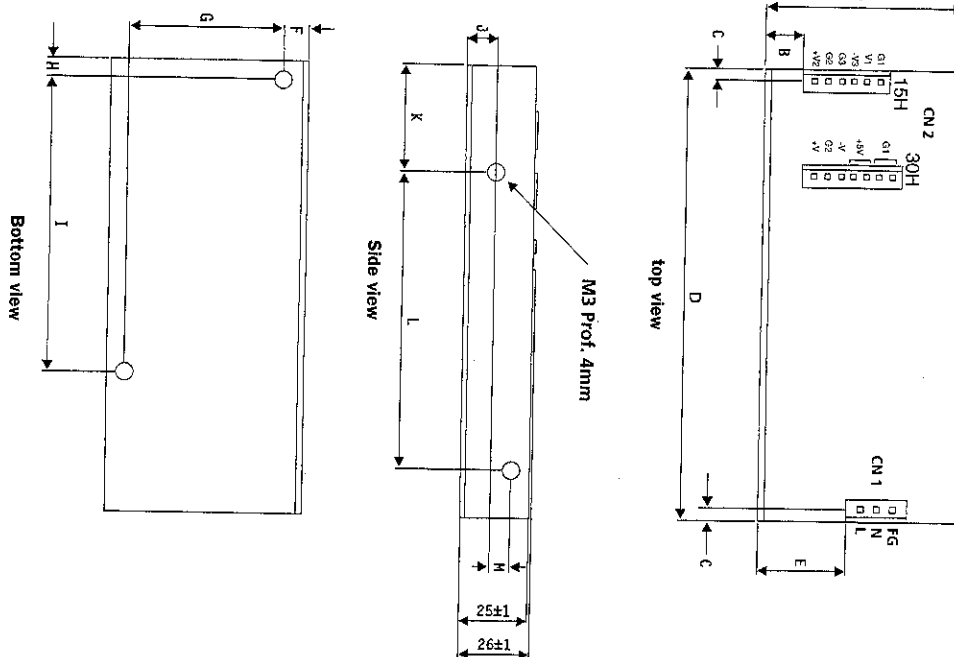

CASE 50H
Weight 0.4Kg

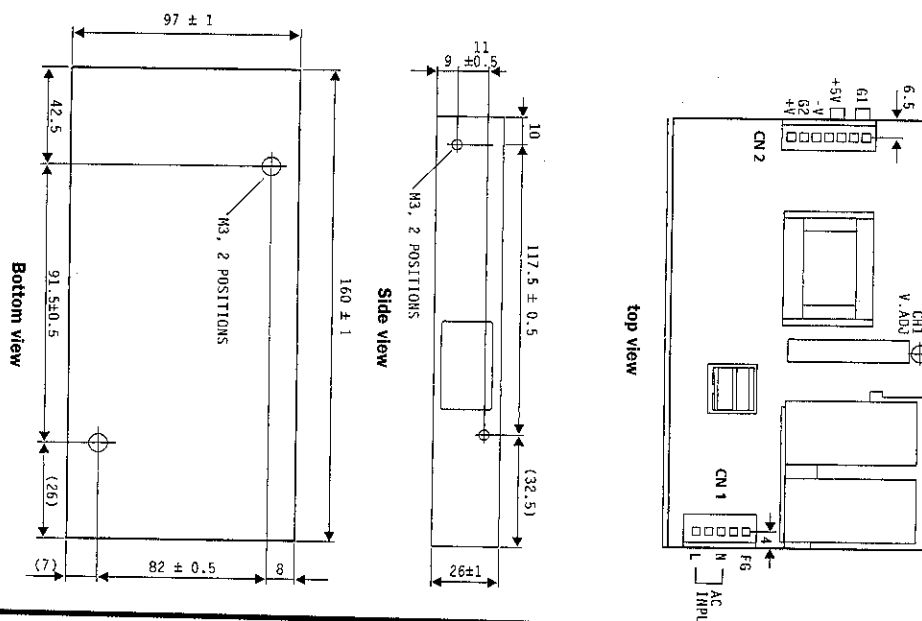

Case	Dimensions (mm)												
	A	B	C	D	E	F	G	H	I	J	K	L	M
15H	60±1	8.5	4.5	128±1	27.5	5.5	50.5±0.5	4	99±0.5	8	4	46±0.5	11±0.5
30H	70±1	15.5	4	160±1	10	43	23±0.5	17	138±0.5	12	45	100±0.5	8±0.5

Series LWDH-LWD

LAMBDA
An Invensys company

EDITION 2001