


PD800A-SERIES

AC-DC Front end power module

LAMBDA
DENSEI-LAMBDA

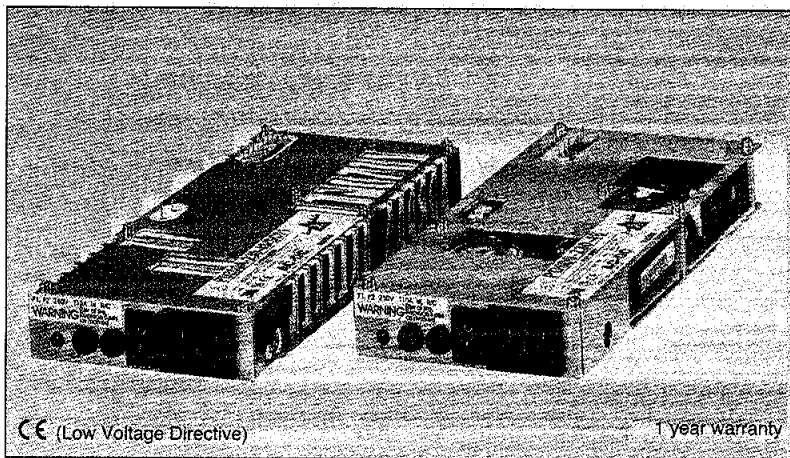

CE (Low Voltage Directive)

1 year warranty

Features

- Wide Range Input 88 ~ 265VAC
- High efficiency 90% (typ)
- Conducted EMC : EN55022-A
- Power Factor Correction : EN61000-3-2
- Susceptibility : EN61000-4-2, -3, -4, -5, -6
- N+1 redundant parallel operation
- CE marking (Low Voltage Directive)

Safety approvals

UL1950

CSA950

EN60950

General

With the PD Series, DENSEI-LAMBDA is presenting a revolutionary new concept of AC/DC converters.

Through its extreme compactness, an efficiency of 90%, and the mechanical construction, these modules offers maximum in design flexibility.

All functions, including filtering, Power Factor Correction, AC/DC Conversion as well as monitoring and signal-generation are integrated into the modules. The size and form of these Power Modules makes it very simple to use as a basic component for a 3U, 6U or an individually built power supply.

Whatever size, form, physical interface and specification your system requires, the PD's will fit.

Your custom power supply is achieved by just putting 4 components together:

•PCB •PD-Module •Heatsink •Output-Connector

The PD-Series meets all relevant EMC directives – and worldwide Telecom Standards.

Product line

Type	Model Name	Input (*1)	Max. Output Power at 187 ~ 265VAC (*1)	AC Inlet	AC Switch	Input Pins	Full Cover	Top Plate	Cooling	Outline Drawing
Standard	PD800A-230-48/C01	88 ~ 265VAC	50.5VDC 16.0A 808W	Yes	Yes	No	Yes	No	Forced Air Cooling	1
Optional Model	PD800A-230-48/SC01	88 ~ 265VAC	50.5VDC 16.0A 808W	Yes	No	No	Yes	No	Forced Air Cooling	1
	PD800A-230-48/P01	88 ~ 265VAC	50.5VDC 16.0A 808W	No	No	Yes	No	Yes	Forced Air Cooling	2
	PD800A-230-48	88 ~ 265VAC	50.5VDC 16.0A 808W	Yes	Yes	No	No	Yes	Forced Air Cooling	1
	PD600-230-48	88 ~ 265VAC	50.5VDC 12.0A 606W	Yes	Yes	No	No	Yes	Convection Cooling	1
	PD600-230-48/P01	88 ~ 265VAC	50.5VDC 12.0A 606W	No	No	Yes	No	Yes	Convection Cooling	2
	PD800A-230-30/P01	187 ~ 265VAC	30VDC 24.0A 720W	No	No	Yes	No	Yes	Forced Air Cooling	2
	PD800A-230-28	187 ~ 265VAC	28VDC 25.7A 720W	Yes	Yes	No	No	Yes	Forced Air Cooling	2

*1. Output Power will vary depending upon input voltage. Refer to instruction manual.


Specifications

Model	PD800A-230-48/C01 (Forced Air Cooling)			PD600-230-48 (Convection Cooling)			PD800A-230-30/P01	PD800A-230-28
1. Input Voltage range	100-240VAC			100-240VAC			200-240VAC	200-240VAC
	100 ~ 240VAC	100 ~ 265VAC	187 ~ 265VAC	88 ~ 265VAC	100 ~ 265VAC	187 ~ 265VAC	187 ~ 265VAC	187 ~ 265VAC
2. Nominal Output Voltage	50.5VDC	50.5VDC	50.5VDC	50.5VDC	50.5VDC	50.5VDC	30VDC	28VDC
3. Maximum Output Current	8.0A	10.0A	16.0A	8.0A	10.0A	12.0A	24.0A	25.7A
4. Maximum Output Power	404W	505W	808W	404W	505W	606W	720W	720W
5. Output Voltage Range	24.0 ~ 58.5V	24.0 ~ 58.5V	24.0 ~ 58.5V	24.0 ~ 58.5V	24.0 ~ 58.5V	24.0 ~ 58.5V	24.0 ~ 32.0V	18.0 ~ 36.0V
6. Bulk Power Supply	370VDC (typ) 1A max.		370VDC (typ) 2A max.	370VDC (typ) 1A max.		370VDC (typ) 1.5A max.	370VDC (typ) 1.9A max.	370VDC (typ) 1.9A max.
7. Efficiency (typ)	85%		90%	85%		90%	90%	90%
8. Input Current	5.5A		4.2A	5.5A		3.0A	3.8A	3.8A
9. Power Factor	0.95 (min.)		0.95 (min.)	0.95 (min.)		0.95 (min.)	0.95 (min.)	0.95 (min.)
10. Cooling	Fan Cooled (1.0m/sec. min.)			Convection cooled			Fan Cooled (1.0m/sec. min.)	Fan Cooled (1.0m/sec. min.)
11. Operating Temperature	-20 ~ +85°C (Baseplate), -20 ~ +70°C (Ambient)			-20 ~ +85°C (Baseplate), -20 ~ +45°C (Ambient)			-20 ~ +75°C (Baseplate)	-20 ~ +55°C (Ambient)
12. Withstand Voltage	Input to output: 4.2kVDC for 1 min., Input to baseplate: 2.1kVDC for 1 min. Output to baseplate: 500VDC for 1 min.							
13. Functions	OVP, OCP, Remote sensing, Inverter good signal, Aux-Bias power supply (11-13V/30mA)							


Output derating

PD800A-230-48/C01

Derating Curve A
at Baseplate Temp. $\leq 85^{\circ}\text{C}$
and Ambient Temp. $\leq 50^{\circ}\text{C}$




Derating Curve B
at Baseplate Temp. $\leq 85^{\circ}\text{C}$



PD600-230-48


Derating Curve A
at Baseplate Temp. $\leq 85^{\circ}\text{C}$
and Ambient Temp. $\leq 45^{\circ}\text{C}$



PD800A-SERIES

LAMBDA
DENSEI-LAMBDA

Outline drawing 1

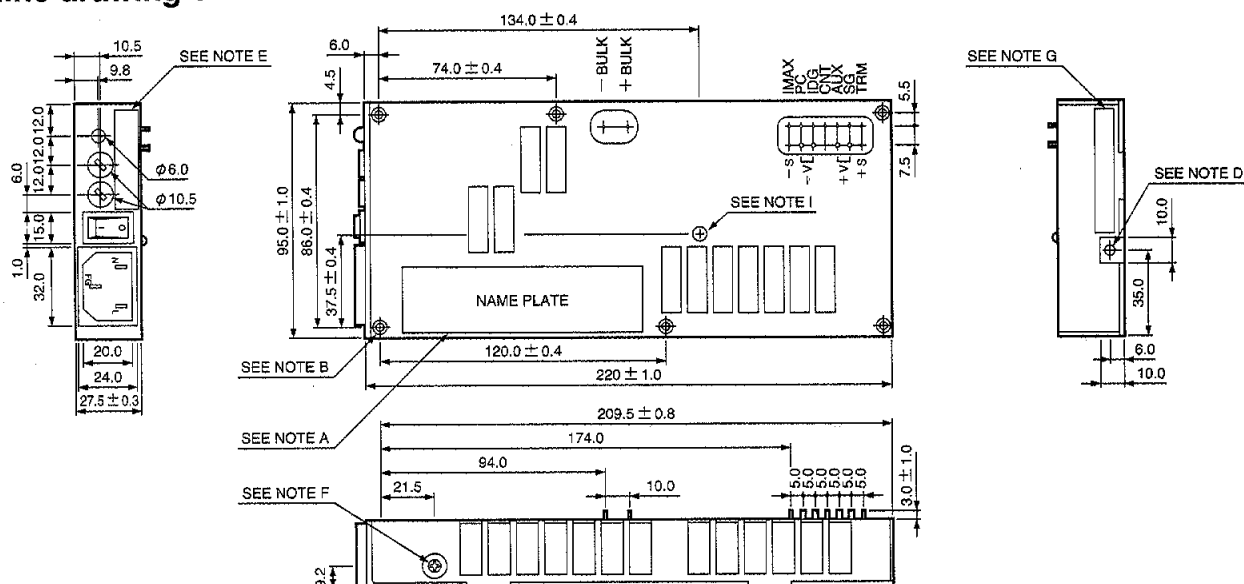

NOTE A : MODEL NAME, INPUT VOLTAGE RANGE, NOMINAL OUTPUT RANGE, NOMINAL OUTPUT VOLTAGE, MAXIMUM OUTPUT CURRENT, COUNTRY OF MANUFACTURE AND SAFETY MARKS ARE SHOWN HERE.

NOTE B : 6X ϕ 3.0 TAPPED HOLES FOR CUSTOMER CHASSIS MOUNTING SCREWS MUST NOT PROTRUDE INTO POWER MODULE BY MORE THAN 10mm (FAR SIDE FOR HEATSINK).

NOTE C : INPUT AND OUTPUT TERMINALS
INPUT : IEC 320 C14 PLUG
PRIMARY OUTPUT : 2 - ϕ 0.8
SECONDARY OUTPUT : 4 - 1.4 X 1
9 - ϕ 0.8

RECOMMENDED CUSTOMER PCB HOLES :
FOR 11X ϕ 0.8 PINS : USE 1.2mm HOLE SIZE
FOR 1.4X1 POWER PINS : USE 2mm HOLE SIZE
REFER TO INSTRUCTION MANUAL FOR DETAILS.

NOTE D : M4.0 TAPPED HOLES FOR PROTECTIVE EARTH CONNECTION. SCREW MUST NOT PROTRUDE INTO POWER MODULE BY MORE THAN 8mm.

NOTE E : FUSE MARKING SEAL

NOTE F : REMOVE THIS M3 COUNTERSUNK SCREW TO CHECK POWER MODULE WITHSTAND VOLTAGE


NOTE G : SERIAL NUMBER LABEL

NOTE H : AC SWITCH ON/OFF INDICATION.



NOTE I : M3 PAN HEAD SCREW FOR FIXING CHASSIS, 8mm HOLE REQUIRED ON CUSTOMER PCB.

Outline drawing 2

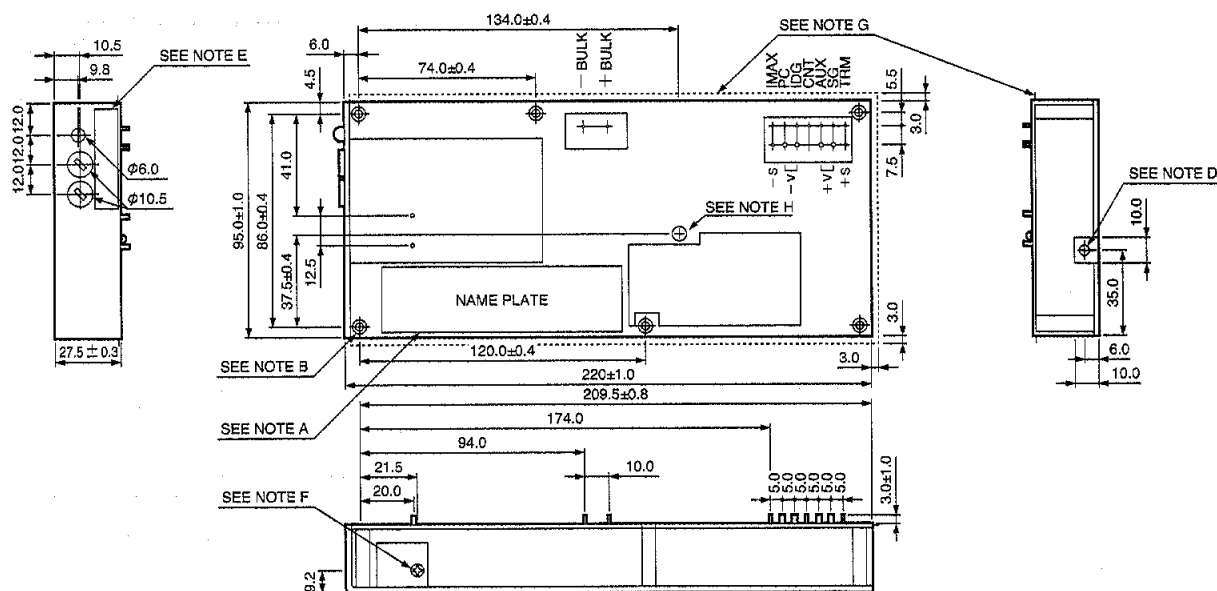

NOTE A : MODEL NAME, INPUT VOLTAGE RANGE, NOMINAL OUTPUT RANGE, NOMINAL OUTPUT VOLTAGE, MAXIMUM OUTPUT CURRENT, COUNTRY OF MANUFACTURE AND SAFETY MARKS ARE SHOWN HERE IN ACCORDANCE.

NOTE B : 6X ϕ 3.0 TAPPED HOLES FOR CUSTOMER CHASSIS MOUNTING SCREWS MUST NOT PROTRUDE INTO POWER MODULE BY MORE THAN 10mm (FAR SIDE FOR HEATSINK).

NOTE C : INPUT AND OUTPUT TERMINALS
INPUT : 2 - ϕ 1.6
PRIMARY OUTPUT : 2 - ϕ 0.8
SECONDARY OUTPUT : 4 - 1.4 X 1
9 - ϕ 0.8

RECOMMENDED CUSTOMER PCB HOLES :
FOR 2X ϕ 0.6 PINS : USE 2.0mm HOLE SIZE
FOR 11X ϕ 0.8 PINS : USE 1.2mm HOLE SIZE
FOR 1.4X1 POWER PINS : USE 2mm HOLE SIZE
REFER TO INSTRUCTION MANUAL FOR DETAILS.

NOTE D : M4.0 TAPPED HOLES FOR PROTECTIVE EARTH CONNECTION. SCREW MUST NOT PROTRUDE INTO POWER MODULE BY MORE THAN 8mm.

NOTE E : FUSE MARKING SEAL

NOTE F : REMOVE THIS M3 COUNTERSUNK SCREW TO CHECK POWER MODULE WITHSTAND VOLTAGE

NOTE G : NOMEX INSULATOR FOR PRIMARY TO GROUND CREEPAGE AND CLEARANCE

NOTE H : M3 PAN HEAD SCREW FOR FIXING CHASSIS, 8mm HOLE REQUIRED ON CUSTOMER PCB.


PD800A-SERIES

LAMBDA
DENSEI-LAMBDA


■ Operation status indicator on the module front side

Medium	Color	Status
Multicolor LED	Green	Constant voltage mode
	Red	Constant current mode
	Orange	Constant power operation
	Light Green	Remote off

■ PC board mounting & heat sink

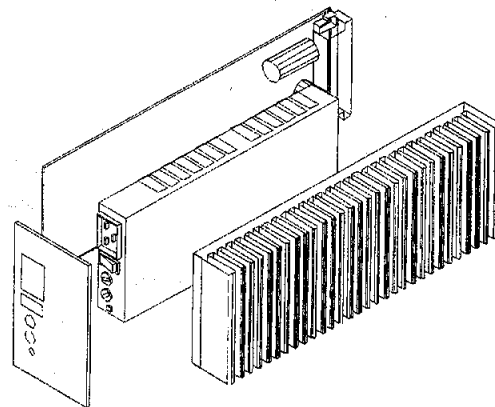

■ System application

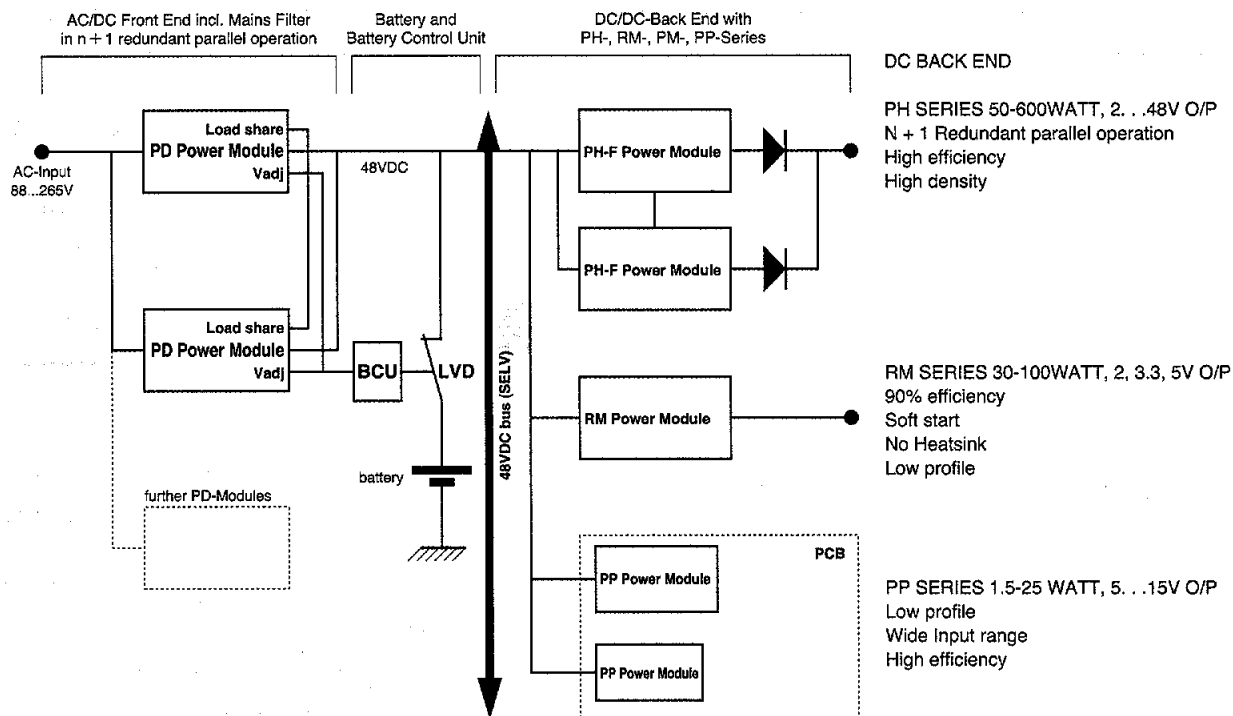

FRONT END

PD SERIES 600W (mounting on board)

Features:

500 Watt at 88...265VAC Input
800 Watt at 187...265VAC Input
PFC: EN61000-3-2
EMI: EN55022 A
EN61000-4-2,3,4,5
meets VDE 0160 W2 Transient
High efficiency 90%
N + 1 parallel operation

PLEASE REFER TO INSTRUCTION MANUAL ON CIRCUIT DESIGN, PCB DESIGN, THERMAL DESIGN AND INSTALLATION FOR PRACTICAL APPLICATION.

* Please ask our nearest sales office more in detail for application such as installation or thermal designing.

Power Module