APPLICATION			LTR	E.C.O. NO.	BY	APP.
USED ON	NEXT ASSY.	QTY.	A	REL TO MFG. 4/94	JJR	GFS
			B	ADDED DIM/END VIEW 7/97	RHS	GFS
			C	ECO16952 12/18/97	RHS	

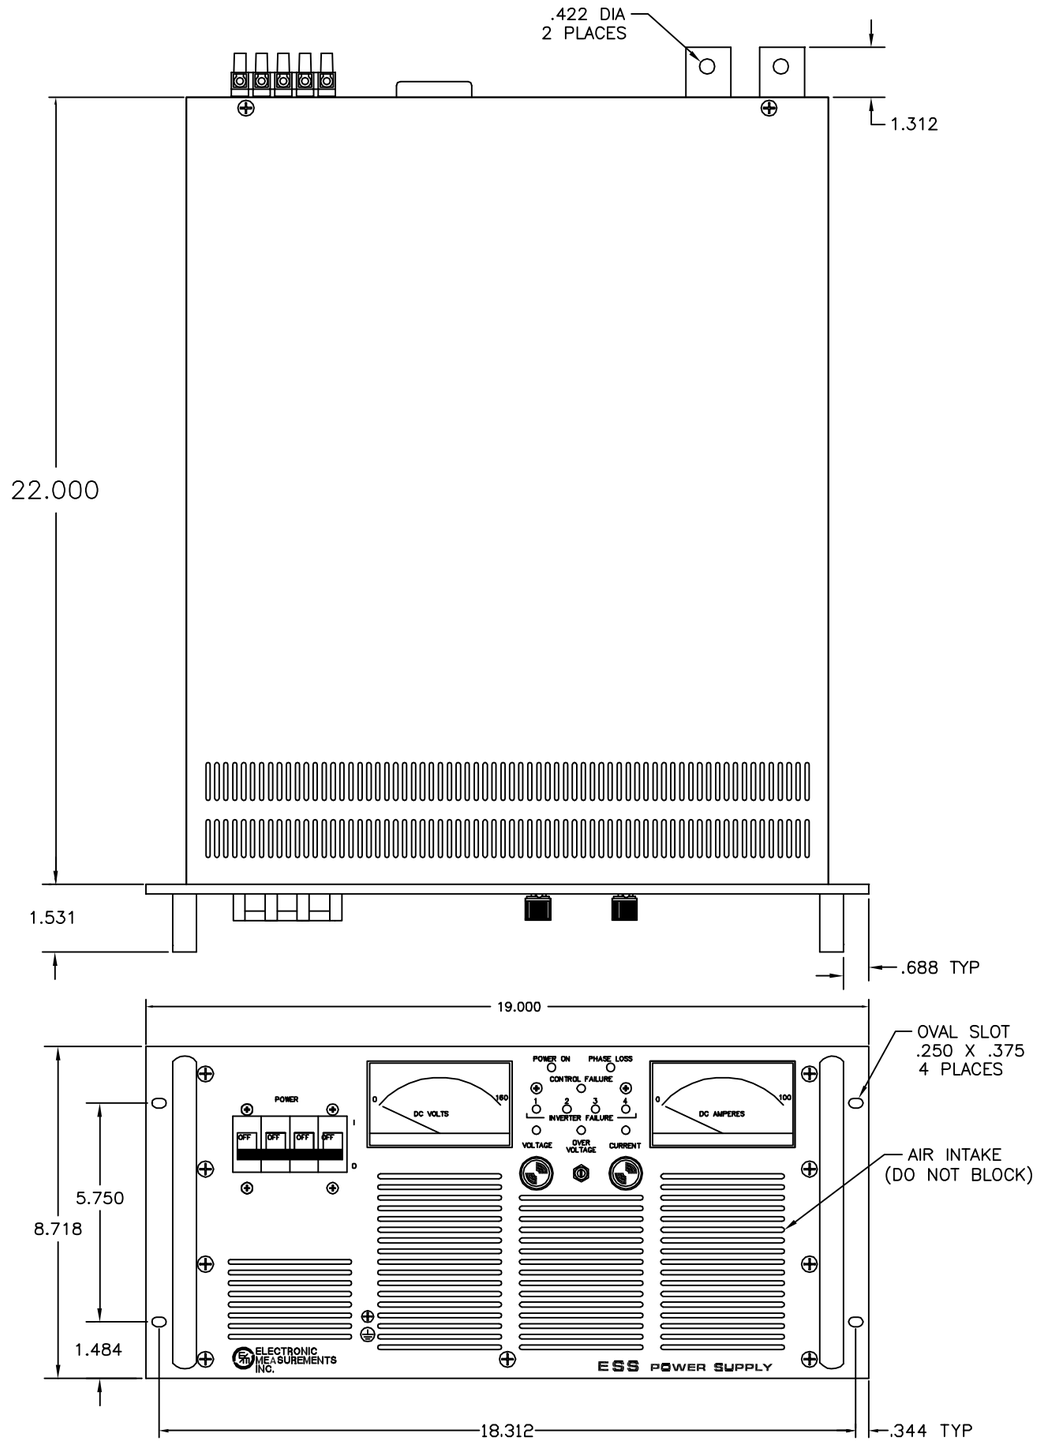

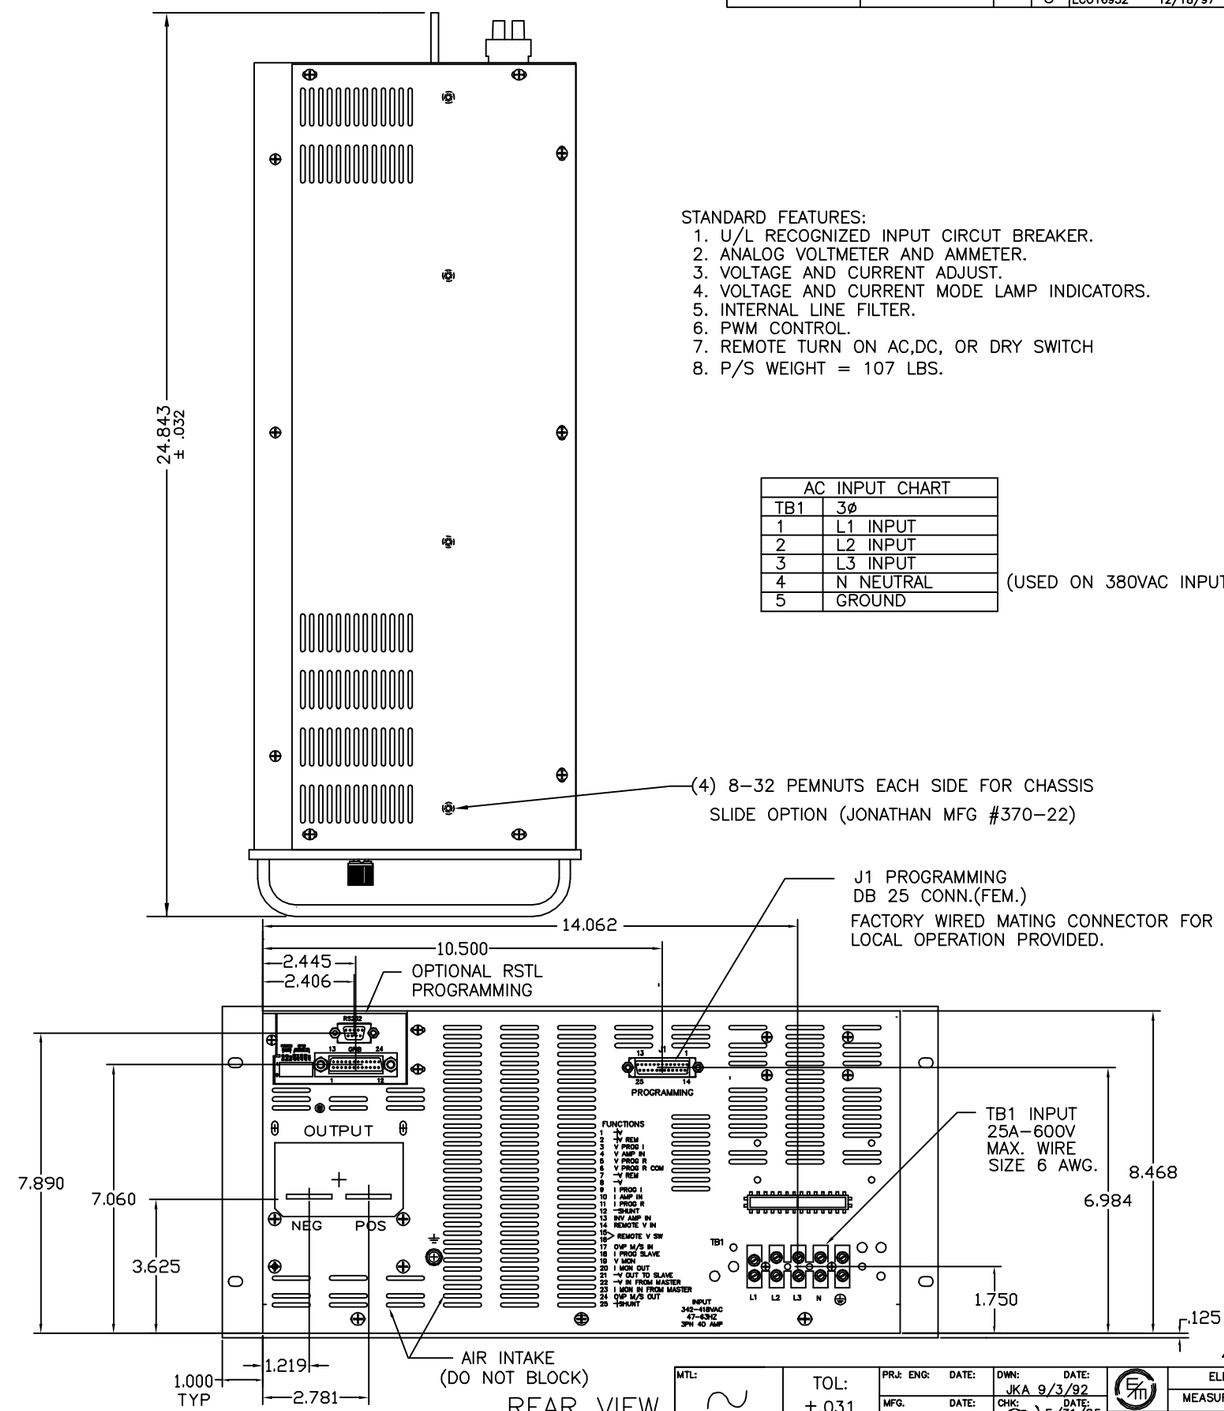

STANDARD FEATURES:
1. U/L RECOGNIZED INPUT CIRCUT BREAKER.
2. ANALOG VOLTMETER AND AMMETER.
3. VOLTAGE AND CURRENT ADJUST.
4. VOLTAGE AND CURRENT MODE LAMP INDICATORS.
5. INTERNAL LINE FILTER.
6. PWM CONTROL.
7. REMOTE TURN ON AC,DC, OR DRY SWITCH
8. P/S WEIGHT = 107 LBS.

AC INPUT CHART		
TB1	3ø	
1	L1 INPUT	
2	L2 INPUT	
3	L3 INPUT	
4	N NEUTRAL	(USED ON 380VAC INPUT ONLY)
5	GROUND	

415VAC

MTL: ~	TOL: ±.031	PR.: ENG: DATE:	DWN: JKA 9/3/92 DATE:	ELECTRONIC MEASUREMENTS, INC.
		MFG. DATE:	CHK: 5/31/95 DATE:	TITLE: DIM. OUTLINE DWG. ESS 10KW STD.
FIN: ~	P/L: 481	DOC. REL. DATE:	ENG: JR 5/31/95 DATE:	
	SCALE: NONE		APP: DATE:	DWG. NO. 02-481-007 REV. C