


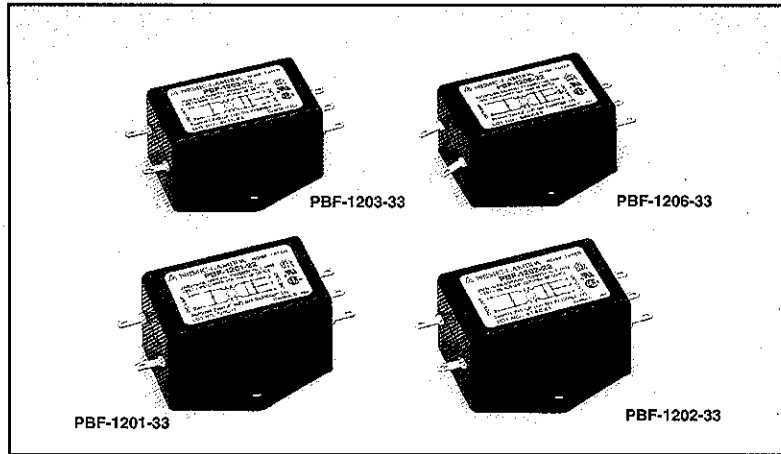

■ Features

- (1) For equipment designed to conform EMI regulations such as VCCI, CISPR, FCC, VDE, etc..
- (2) Attenuates conductive emission from power supply.
- (3) Leakage current: 0.75mA max. (250V, 60Hz).
- (4) Compact package.
- (5) Simple wiring and easy maintenance by fast-on tab.
- (6) Low price.

■ Safety standard


-  UL1283,  CSA Std. C22. 2 No. 8
 VDE0565 Teil. 3

■ Specifications


Item	Model	PBF-1201-22	PBF-1202-22	PBF-1203-22	PBF-1206-22
1	Rated voltage (AC, DC)	250V			
2	Rated current (AC, DC) (Note)	1A	2A	3A	6A
3	Test voltage (terminal to case, AC 1 minute)	2500V			
4	Isolation resistance (terminal to case, 500VDC)	100MΩ min.			
5	Leakage current	125V, 60Hz	0.35mA max.		
		250V, 60Hz	0.75mA max.		
6	DC resistance	1.2Ω max.	0.4Ω max.	0.2Ω max.	0.07Ω max.
7	Temperature rise	30°C max.			
8	Operating temperature range	-25 ~ +85°C			
9	Weight (typ)	50g			

(Note) : Value at Ta ≤ 55°C. Refer to the derating curve shown below at Ta > 55°C.


■ Circuit

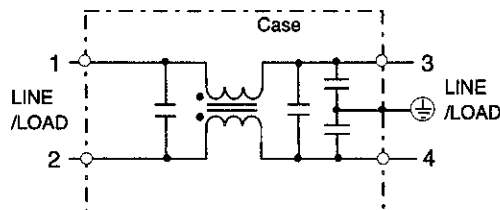

■ Derating

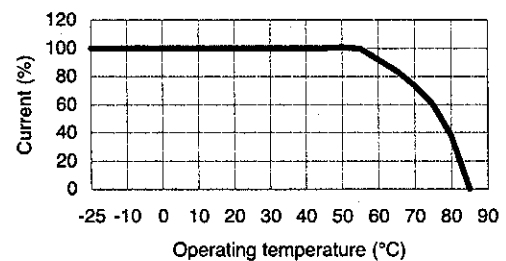


■ Outline drawings

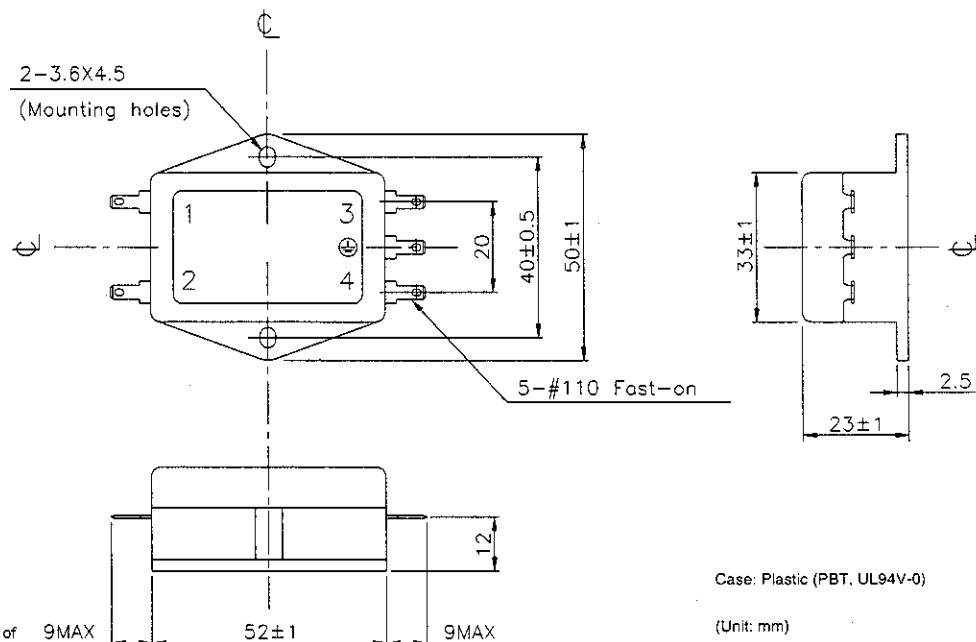


- Contact Technical Sales for further details of specifications, outline, characteristics, etc. Read the instruction manual before usage.
- Contact us about delivery before ordering.

■ Typical Insertion Loss Symmetrical
 ——— Asymmetrical


PBF-1201

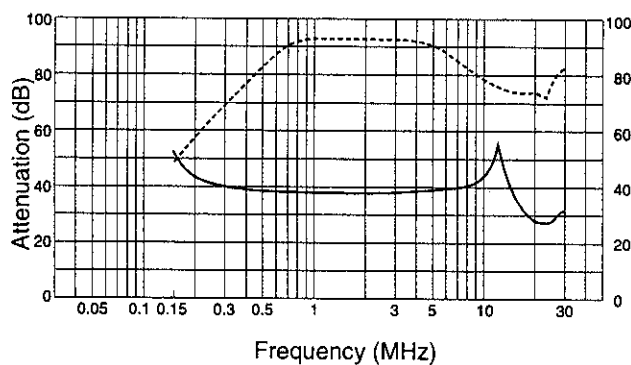

PBF-1202

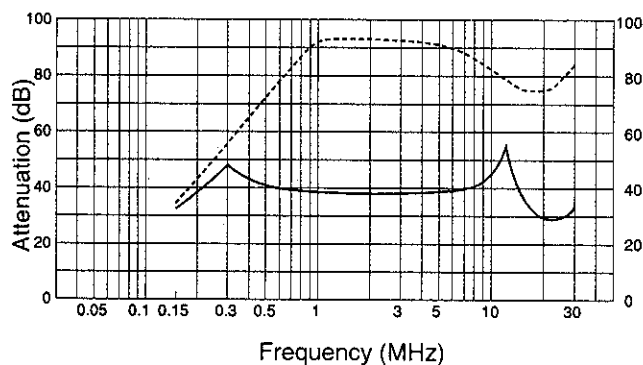

PBF-1203

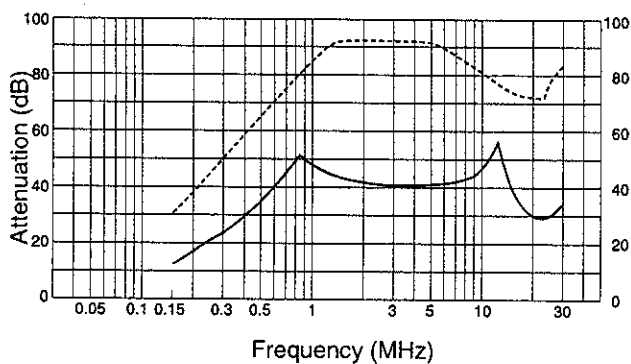

PBF-1206

